



加厚实芯合金钢X架
Solid plate X supporting arm

全新高强度合金助力臂，电脑3D动态模拟设计，满载下平稳下降。
High strength alloy auxiliary system, smooth decline at full loading which designed by dynamic 3D shape simulation

130mm
初始高度仅有130mm
130mm Above The Ground At The Lowest Level

选配超薄转盘
Ultrathin angle plate as optional specification

意大利阀，铜芯电机
Italian valve copper core motor

精准激光切割技术
High precision laser cutting

实芯钢X架气动机械保险锁
Solid plate X construction pneumatic mechanical safety

日本/意大利进口密封圈
Japanese / Italian oil seals

标配欧标二次举升小车
the EU Standard Jack

独立人性化小车安全设计，负重时小车固定，空载移动轻松
Fixed when loaded and moves easily when unloaded

选购 Optional

原装进口意大利全套泵站
Whole Set of Italian Hydraulic Unit

静态测试 150% Static Test

动态测试 115% Dynamic Test

欧盟测试标准 the EU test standard

产品特点:

- ◆超薄式结构，降低时厚度只有130mm。
- ◆意大利技术设计制造。
- ◆液压同步，双液压系统、液压锁和机械三重保险装置，下降自动解锁。
- ◆24V安全控制电路。
- ◆桥板采用整板折弯焊接而成，更精密，更牢固。
- ◆油缸部件采用高转速全自动CNC数控车床加工而成，保证了优秀的同心度和光洁度，缸筒滚压镜面处理。

- ◆日本/意大利密封件，意大利球阀。
- ◆采用激光等数控设备切割，尺寸精确，切口平整，光洁度高。
- ◆X架采用优质合金钢，激光切割而成，实芯钢板，强度高，耐腐蚀，不易变形。
- ◆抛丸表面处理，高温喷涂处理，保证了耐用性。
- ◆可伸缩的二次举升面板。
- ◆所有轴的位置均有耐磨轴承，高分子耐磨滑块。
- ◆红外水平检测装置、下降防压脚装置（选购）。

Product Features:


- ◆Double level scissor lift, 130mm above the ground at the lowest level
- ◆Adopt Italy technology to design
- ◆Double hydraulic balance system(main lift)and mechanical safety with automatic unlock are equipped
- ◆24V safety control circuit
- ◆Laser cutting whole-plate platforms, more accurate and stronger
- ◆Oil cylinder parts made by automatic high rotation speed CNC lathe ensure the excellent finish and concentricity
- ◆Japanese / Italian oil sealing elements, Italian spherical valve, overload

protection, international brand oil pipe


- ◆Components are made by laser cutting machine or other CNC equipment
- ◆Alloy solid steel X structure, good rust resistance and not easy to deformation
- ◆Shot blasting and high temperature baking powder coated surface finish
- ◆Second-level extensible platform
- ◆Wear-resisting bearings, polymer wear-resistance slider
- ◆Optional infra-red electronic leveling sensor, optional anti presser foot device

机 型 Model	母机举升重量 Capacity of Main Lift	小车举升重量 Trolley Lifting Capacity	初始高度 Initial Height	母机举升高度 Main Lift Lifting Height	小车举升高度 Trolley Lifting Height	母机平台长度 Main Lift Platform Length	母机平台宽度 Main Lift Platform Width
SHL-Y-J-40CCX	4000kg	2000kg	130mm	1660mm	450mm	4520mm	640mm
SHL-Y-J-40CCX Pro (加高行程Higher lifting height)	4000kg	2000kg	140mm	1850mm	450mm	4800mm/5000mm	640mm
SHL-Y-J-50CCX	5000kg	3000kg	140mm	1850mm	450mm	5000mm/5150mm	640mm

通用电机功率(Motor power): 3KW 适用电压(Motor voltage): 380V/220V/Other 气源压力(Air pressure): 0.4–0.6Mpa

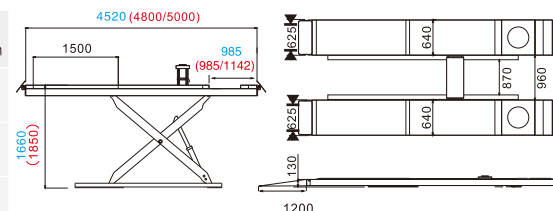

■ SHL-Y-J-40CCX ■ SHL-Y-J-40CCX Pro

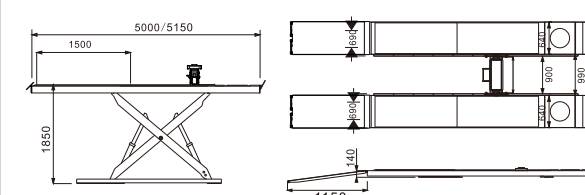

SHL-Y-J-50CCX